
UC2 - *Standard duty*



UNF suffix: inch sizes set screws

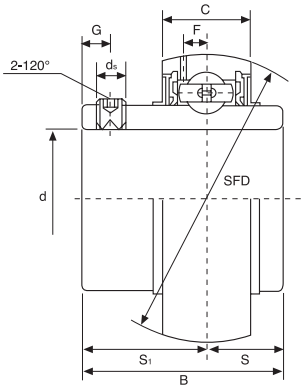


Type	Dimensions									Load ratings (N)		Weight
	d	D	B	C	S	S_1	G	d_s	F	Dynamic C	Static C_o	
	mm/inch											kg
UC201	**12**	47	31	17	12,7	18,3	4,8	M6x1	3,7	12160	6318	0,20
UC201-8	¾	1,8504	1,2205	0,6693	0,500	0,720	0,189	¼-28UNF	0,146			0,19
UC202	**15**	47	31	17	12,7	18,3	4,8	M6x1	3,7	12160	6318	0,19
UC202-9	9/16	1,8504	1,2205	0,6693	0,500	0,720	0,189	¼-28UNF	0,146			0,19
UC202-10	5/8											0,19
UC203	**17**	47	31	17	12,7	18,3	4,8	M6x1	3,7	12160	6318	0,18
UC203-11	11/16	1,8504	1,2205	0,6693	0,500	0,720	0,189	¼-28UNF	0,146			0,17
UC204	**20**	47	31	17	12,7	18,3	4,8	M6x1	3,7	12160	6318	0,16
UC204-12	¾	1,8504	1,2205	0,6693	0,500	0,720	0,189	¼-28UNF	0,146			0,16
UC205	**25**	52	34,1	17	14,3	19,8	5	M6x1	3,9	13300	7457	0,20
UC205-13	13/16											0,24
UC205-14	7/8	2,0472	1,3425	0,6693	0,563	0,780	0,197	¼-28UNF	0,154			0,23
UC205-15	15/16											0,21
UC205-16	1											0,20
UC206	**30**	62	38,1	19	15,9	22,2	5	M6x1	5,0	18525	10735	0,32
UC206-17	11/16											0,33
UC206-18	11/8	2,4409	1,5000	0,7480	0,626	0,874	0,197	¼-28UNF	0,197			0,34
UC206-19	13/16											0,32
UC206-20	1¼											0,31
UC207	**35**	72	42,9	20	17,5	25,4	7	M8x1	5,7	24415	14630	0,48
UC207-20	1¼											0,54
UC207-21	15/16	2,8346	1,6890	0,7874	0,689	1,000	0,276	5/16-24UNF	0,224			0,51
UC207-22	13/8											0,48
UC207-23	17/16											0,45
UC208	**40**	80	49,2	21	19	30,2	8	M8x1	6,2	27645	16910	0,64
UC208-24	1½	3,1496	1,9370	0,8268	0,748	1,189	0,315	5/16-24UNF	0,244			0,68
UC208-25	19/16											0,65
UC209	**45**	85	49,2	22	19	30,2	8	M8x1	6,4	32395	20235	0,68
UC209-26	15/8											0,78
UC209-27	111/16	3,3465	1,9370	0,8661	0,748	1,189	0,315	5/16-24UNF	0,252			0,74
UC209-28	1¾											0,70
UC210	**50**	90	51,6	24	19	32,6	10	M10x1	6,5	33345	22135	0,80
UC210-29	113/16											0,92
UC210-30	17/8	3,5433	2,0315	0,9449	0,748	1,283	0,394	3/8-24UNF	0,256			0,87
UC210-31	115/16											0,82
UC210-32	2											0,78
UC211	**55**	100	55,6	25	22,2	33,4	10	M10x1	7,0	41230	27930	1,11
UC211-32	2											1,26
UC211-33	21/16	3,9370	2,1890	0,9843	0,874	1,315	0,394	3/8-24UNF	0,276			1,20
UC211-34	21/8											1,15
UC211-35	23/16											1,09
UC212	**60**	110	65,1	27	25,4	39,7	10	M10x1	7,6	49780	34390	1,54
UC212-36	2¼											1,67
UC212-37	25/16	4,3307	2,5630	1,0630	1,000	1,563	0,394	3/8-24UNF	0,299			1,59
UC212-38	23/8											1,52
UC212-39	27/16											1,45
UC213	**65**	120	65,1	28	25,4	39,7	10	M10x1	8,5	54340	38095	1,85
UC213-40	2½	4,7244	2,5630	1,1024	1,000	1,563	0,394	3/8-24UNF	0,335			1,94
UC213-41	29/16											1,85
UC214	**70**	125	74,6	29	30,2	44,4	12	M12x1,5	8,9	59090	41895	2,05
UC214-42	25/8											2,26
UC214-43	211/16	4,9213	2,9370	1,1417	1,189	1,748	0,472	7/16-20UNF	0,350			2,16
UC214-44	2¾											2,06
UC215	**75**	130	77,8	30	33,3	44,5	12	M12x1,5	9,2	64030	45885	2,21
UC215-45	213/16											2,46
UC215-46	27/8	5,1181	3,0630	1,1811	1,311	1,752	0,472	7/16-20UNF	0,362			2,35
UC215-47	215/16											2,24
UC215-48	3											2,12
UC216	**80**	140	82,6	32	33,3	49,3	12	M12x1,5	9,5	69065	50350	2,80
UC216-49	31/16											2,98
UC216-50	31/8	5,5118	3,2520	1,2598	1,311	1,9409	0,472	7/16-20UNF	0,374			2,85
UC216-51	33/16											2,72
UC217	**85**	150	85,7	34	34,1	51,6	12	M12x1,5	10,2	79800	58805	3,46
UC217-52	3¼											3,68
UC217-53	35/16	5,9055	3,3740	1,3386	1,343	2,031	0,472	7/16-20UNF	0,402			3,54
UC217-55	37/16											3,25
UC218	**90**	160	96	36	39,7	56,3	12	M12x1,5	11,2	91295	67925	4,36
UC218-56	3½	6,2992	3,7795	1,4173	1,5630	2,217	0,472	7/16-20UNF	0,441			4,47

Available stainless steel AISI 440C

FISATECH

HC2 - *Standard duty*

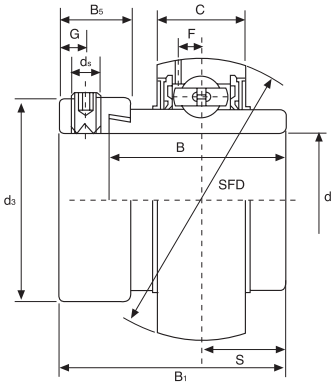



UNF suffix: inch sizes set screws

Type	Dimensions											Load ratings (N)		Weight
	d	D	B_1	B	C	S	d_5	G	B_5	d_3	F	Dynamic C	Static C_o	
	mm/inch													kg
HC204	**20**	47	43,7	34,2	17	17,1	M6x1	4,8	13,5	33,3	3,7	12160	6318	0,23
HC204-12	1¾	1,8504	1,720	1,3465	0,6693	0,673	¼-28UNF	0,189	0,531	1,311	0,146			0,23
HC205	**25**	52	44,4	34,9	17	17,5	M6x1	4,8	13,5	38,1	3,9			0,27
HC205-13	13/16													0,32
HC205-14	7/8	2,0472	1,748	1,3740	0,6693	0,689	¼-28UNF	0,189	0,531	1,500	0,154	13300	7457	0,31
HC205-15	15/16													0,29
HC205-16	1													0,27
HC206	**30**	62	48,4	36,5	19	18,3	M8x1	6	15,9	44,5	5,0			0,45
HC206-17	11/16													0,50
HC206-18	11/8	2,4409	1,906	1,4370	0,7480	0,720	5/16-24UNF	0,236	0,626	1,752	0,197	18525	10735	0,47
HC206-19	13/16													0,45
HC206-20	1¼													0,42
HC207	**35**	72	51,1	37,6	20	18,8	M8x1	6,8	17,5	55,6	5,7			0,60
HC207-20	1¼													0,67
HC207-21	15/16	2,8346	2,012	1,4803	0,7874	0,740	5/16-24UNF	0,268	0,689	2,189	0,224	24415	14630	0,63
HC207-22	13/8													0,60
HC207-23	17/16													0,57
HC208	**40**	80	56,3	42,8	21	21,4	M8x1	6,8	18,3	60,3	6,2			0,79
HC208-24	1½	3,1496	2,217	1,6850	0,8268	0,843	5/16-24UNF	0,268	0,720	2,374	0,244	27645	16910	0,84
HC208-25	19/16													0,80
HC209	**45**	85	56,3	42,8	22	21,4	M8x1	6,8	18,3	63,5	6,4			0,85
HC209-26	15/8													0,96
HC209-27	111/16	3,3465	2,217	1,6850	0,8661	0,843	5/16-24UNF	0,268	0,720	2,5000	0,252	32395	20235	0,91
HC209-28	1¾													0,87
HC210	**50**	90	62,7	49,2	24	24,6	M8x1	6,8	18,3	69,9	6,5			0,99
HC210-29	113/16													1,14
HC210-30	17/8	3,5433	2,469	1,9370	0,9449	0,969	5/16-24UNF	0,268	0,720	2,752	0,256	33345	22135	1,08
HC210-31	115/16													1,02
HC210-32	2													0,96
HC211	**55**	100	71,4	55,5	25	27,8	M10x1	8	20,7	76,2	7,0			1,32
HC211-32	2													1,52
HC211-33	21/16	3,9370	2,811	2,1850	0,9843	1,094	3/8-24UNF	0,315	0,815	3,000	0,276	41230	27930	1,44
HC211-34	21/8													1,37
HC211-35	23/16													1,29
HC212	**60**	110	77,8	61,9	27	31	M10x1	8	22,3	84,2	7,6			1,88
HC212-36	2¼													2,04
HC212-37	25/16	4,3307	3,063	2,4370	1,0630	1,220	3/8-24UNF	0,315	0,878	3,315	0,299	49780	34390	1,95
HC212-38	23/8													1,90
HC212-39	27/16													1,77
HC213	**65**	120	85,7	68,6	28	34,1	M10x1	8,5	23,5	86	8,5			2,41
HC213-40	2½	4,7244	3,374	2,7008	1,1024	1,343	3/8-24UNF	0,335	0,925	3,386	0,335	54340	38095	2,51
HC213-41	29/16													2,40
HC214	**70**	125	85,7	68,6	29	34,1	M10x1	8,5	23,5	90	8,9			2,55
HC214-42	25/8													2,79
HC214-43	211/16	4,9213	3,374	2,7008	1,1417	1,343	3/8-24UNF	0,335	0,925	3,543	0,350	59090	41895	2,68
HC214-44	2¾													2,56
HC215	**75**	130	92,1	75	30	37,3	M10x1	8,5	23,5	102	9,2			2,84
HC215-45	213/16													3,14
HC215-46	27/8	5,1181	3,626	2,9528	1,1811	1,469	3/8-24UNF	0,335	0,925	4,016	0,362	64030	45885	3,01
HC215-47	215/16													2,88
HC215-48	3													2,74


Available stainless steel AISI 440C

FISATECH

UCX - *Medium duty*



UNF suffix: inch sizes set screws

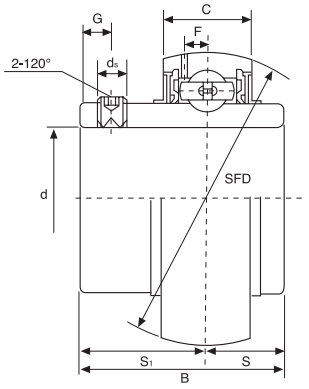


Type	Dimensions									Load ratings (N)		Weight
	d	D	B	C	S	S_1	G	d_s	F	Dynamic C	Static C_o	
	mm/inch											kg
UCX05	**25**	62	38,1	19	15,9	22,2	5	M6x1	5,0			
UCX05-13	13/16											
UCX05-14	7/8	2,4409	1,5000	0,7480	0,626	0,874	0,197	¼-28UNF	0,197	18525	10735	0,39
UCX05-15	15/16											
UCX05-16	1											
UCX06	**30**	72	42,9	20	17,5	25,4	7	M8x1	5,7			
UCX06-17	11/16											
UCX06-18	11/8	2,8346	1,6890	0,7874	0,689	1,000	0,276	5/16-24UNF	0,224	24415	14630	0,68
UCX06-19	13/16											
UCX06-20	1¼											
UCX07	**35**	80	49,2	21	19	30,2	8	M8x1	6,2			
UCX07-21	15/16											
UCX07-22	13/8	3,1496	1,9370	0,8268	0,748	1,189	0,315	5/16-24UNF	0,244	27645	16910	0,82
UCX07-23	17/16											
UCX08	**40**	85	49,2	22	19	30,2	8	M8x1	6,4			
UCX08-24	1½									32395	20235	0,93
UCX08-25	19/16	3,3465	1,9370	0,8661	0,748	1,189	0,315	5/16-24UNF	0,252			
UCX09	**45**	90	51,6	24	19	32,6	10	M10x1	6,5			
UCX09-26	15/8											
UCX09-27	111/16	3,5433	2,0315	0,9449	0,748	1,283	0,394	3/8-24UNF	0,256	33345	22135	1,00
UCX09-28	1¾											
UCX10	**50**	100	55,6	25	22,2	33,4	10	M10x1	7,0			
UCX10-30	17/8											
UCX10-31	115/16	3,9370	2,1890	0,9843	0,874	1,315	0,394	3/8-24UNF	0,276	41230	27930	1,35
UCX10-32	2											
UCX11	**55**	110	65,1	27	25,4	39,7	10	M10x1	7,6			
UCX11-33	21/16											
UCX11-34	21/8	4,3307	2,5630	1,0630	1,000	1,563	0,394	3/8-24UNF	0,299	49780	34390	1,90
UCX11-35	23/16											
UCX11-36	2¼											
UCX12	**60**	120	65,1	28	25,4	39,7	10	M10x1	8,5			
UCX12-38	23/8	4,7244	2,5630	1,1024	1,000	1,563	0,394	3/8-24UNF	0,335	54340	38095	2,27
UCX12-39	27/16											
UCX13	**65**	125	74,6	29	30,2	44,4	12	M12x1,5	8,9			
UCX13-40	2½	4,9213	2,9370	1,1417	1,189	1,748	0,472	7/16-20UNF	0,350	59090	41895	2,45
UCX13-41	29/16											
UCX14	**70**	130	77,8	30	33,3	44,5	12	M12x1,5	9,2			
UCX14-42	25/8											
UCX14-43	211/16	5,1181	3,0630	1,1811	1,311	1,752	0,472	7/16-20UNF	0,362	64030	45885	2,47
UCX14-44	2¾											
UCX15	**75**	140	82,6	32	33,3	49,3	12	M12x1,5	9,5			
UCX15-45	213/16											
UCX15-46	27/8	5,5118	3,2520	1,2598	1,311	1,9409	0,472	7/16-20UNF	0,374	69065	50350	3,11
UCX15-47	215/16											
UCX15-48	3											
UCX16	**80**	150	85,7	34	34,1	51,6	12	M12x1,5	10,2			
UCX16-49	31/16											
UCX16-50	31/8	5,9055	3,3740	1,3386	1,343	2,031	0,472	7/16-20UNF	0,402	79800	58805	3,79
UCX16-51	33/16											
UCX17	**85**	160	96	36	39,7	56,3	12	M12x1,5	11,2			
UCX17-53	35/16	6,2992	3,7795	1,4173	1,5630	2,217	0,472	½-20UNF	0,441	91295	67925	4,82
UCX17-55	37/16											
UCX18	**90**	170	104	39	42,9	61,1	14	M14x1,5	10,5			
UCX18-56	37/16	6,6929	4,0945	1,5354	1,689	2,406	0,511	9/16-18UNF	0,413	103550	77805	5,51
UCX18-57	3½											
UCX20	**100**	190	117,5	44	49,2	68,3	16	M16x1,5	11,3			
UCX20-58	313/16											
UCX20-59	37/8											
UCX20-60	315/16	7,4803	4,6260	1,7323	1,937	2,689	0,630	5/8-18UNF	0,445	126350	99750	8,95
UCX20-61	4											
UCX20-62	4											
UCX20-64	4											

Available stainless steel AISI 440C

FISATECH

UC3 - *Heavy duty*

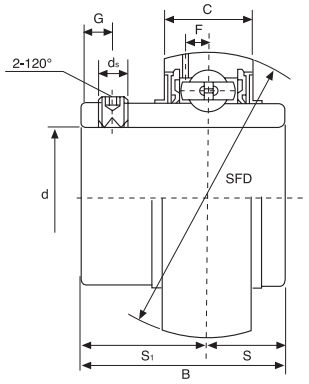



UNF suffix: inch sizes set screws


Type	Dimensions									Load ratings (N)		Weight
	d	D	B	C	S	S_1	G	d_s	F	Dynamic C	Static C_o	
	mm/inch											kg
UC305	**25**	62	38	20	15	23	6	M6x1	5,4			0,35
UC305-13	13/16											0,40
UC305-14	7/8	2,4409	1,4961	0,7874	0,591	0,906	0,236	¼-28UNF	0,213	20140	10355	0,38
UC305-15	15/16											0,36
UC305-16	1											0,35
UC306	**30**	72	43	23	17	26	6	M6x1	5,7			0,56
UC306-17	11/16											0,61
UC306-18	11/8	2,8346	1,6929	0,9055	0,669	1,024	0,236	¼-28UNF	0,225	25365	14250	0,58
UC306-19	13/16											0,56
UC307	**35**	80	48	25	19	29	8	M8x1	6,2			0,71
UC307-20	1¼											0,77
UC307-21	15/16	3,1496	1,8898	0,9843	0,748	1,142	0,315	5/16-24UNF	0,224	31730	18335	0,74
UC307-22	13/8											0,71
UC307-23	17/16											0,68
UC308	**40**	90	52	27	19	33	10	M10x1	7,0			0,96
UC308-24	1½	3,5433	2,0472	1,0630	0,748	1,299	0,394	3/8-24UNF	0,276	38665	22800	1,01
UC308-25	19/16											0,97
UC309	**45**	100	57	30	22	35	10	M10x1	7,8			1,28
UC309-26	15/8											1,39
UC309-27	111/16	3,9370	2,2441	1,1811	0,866	1,378	0,394	3/8-24UNF	0,307	46455	28025	1,35
UC309-28	1¾											1,30
UC310	**50**	110	61	32	22	39	12	M12x1,5	8,5			1,65
UC310-29	113/16											1,97
UC310-30	17/8	4,3307	2,4016	1,2598	0,866	1,535	0,472	7/16-20UNF	0,335	58900	36385	1,74
UC310-31	115/16											1,68
UC311	**55**	120	66	34	25	41	12	M12x1,5	9,2			2,07
UC311-32	2											2,25
UC311-33	21/16	4,7244	2,5984	1,3386	0,984	1,614	0,472	7/16-20UNF	0,362	68020	42750	2,18
UC311-34	21/8											2,12
UC311-35	23/16											2,04
UC312	**60**	130	71	36	26	45	12	M12x1,5	9,8			2,60
UC312-36	2¼											2,75
UC312-37	25/16	5,1181	2,7953	1,4173	1,0236	1,772	0,472	7/16-20UNF	0,386	77805	49590	2,67
UC312-38	23/8											2,58
UC312-39	27/16											2,50
UC313	**65**	140	75	38	30	45	12	M12x1,5	10,5			3,25
UC313-40	2½	5,5118	2,9528	1,4961	1,181	1,772	0,472	7/16-20UNF	0,413	88065	56905	3,34
UC313-41	29/16											3,24
UC314	**70**	150	78	40	33	45	12	M12x1,5	11,1			3,89
UC314-42	25/8											4,11
UC314-43	211/16	5,9055	3,0708	1,5748	1,299	1,772	0,472	7/16-20UNF	0,437	98800	64790	4,00
UC314-44	2¾											3,90
UC315	**75**	160	82	42	32	50	14	M14x1,5	11,8			4,72
UC315-45	213/16											4,99
UC315-46	27/8	6,2992	3,2283	1,6535	1,260	1,969	0,551	9/16-18UNF	0,465	107350	73340	4,85
UC315-47	215/16											4,76
UC315-48	3											4,63
UC316	**80**	170	86	44	34	52	14	M14x1,5	12,5			5,55
UC316-49	31/16											5,72
UC316-50	31/8	6,6929	3,3858	1,7323	1,339	2,047	0,551	9/16-18UNF	0,492	116850	82365	5,58
UC316-51	33/16											5,49
UC317	**85**	180	96	46	40	56	16	M16x1,5	13,1			6,67
UC317-52	3¼											6,89
UC317-53	35/16	7,0866	3,7795	1,8110	1,575	2,205	0,630	5/8-18UNF	0,516	126350	91960	6,76
UC317-55	37/16											6,44
UC318	**90**	190	96	48	40	56	16	M16x1,5	13,8			7,56
UC318-55	37/16	7,4803	3,7795	1,8898	1,575	2,205	0,630	5/8-18UNF	0,543	135850	101650	7,85
UC318-56	3½											7,67
UC319	**95**	200	103	50	41	62	16	M16x1,5	14,7			8,70
UC319-58	35/8											9,03
UC319-59	311/16	7,8740	4,0551	1,9685	1,614	2,441	0,630	5/8-18UNF	0,579	145350	113050	8,85
UC319-60	3¾											8,66
UC320	**100**	215	108	55	42	66	18	M18x1,5	13,5			10,80
UC320-61	313/16											11,20
UC320-62	37/8	8,4646	4,2520	2,1654	1,654	2,598	0,709	5/8-18UNF	0,531	164350	133950	10,98
UC320-63	315/16											10,80
UC320-64	4											10,60
UC321	**105**	225	112	56	44	68	18	M18x1,5	19,1	174800	145350	12,20
UC322	**110**	240	117	60	46	71	18	M18x1,5	20,6	194750	171000	14,30
UC324	**120**	260	126	64	51	75	18	M18x1,5	20,6	196650	175750	18,50
UC326	**130**	280	135	68	54	81	20	M20x1,5	22,2	217550	203300	23,00
UC328	**140**	300	145	73	59	86	22	M20x1,5	23,8	240350	233700	28,50


Available stainless steel AISI 440C

FISATECH

UK2 - *Standard duty*



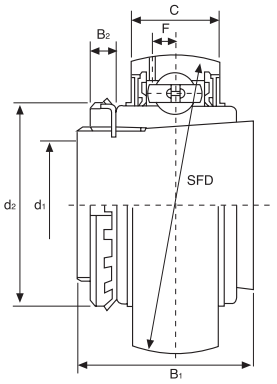

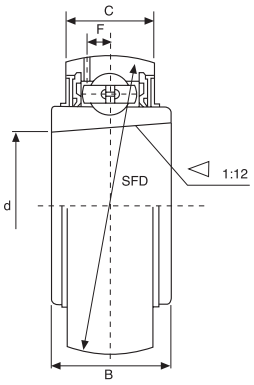


Type	Dimensions									Load ratings (N)		Weight
	d	D	B	C	d_1	B_1	B_2	d_2	F	Dynamic C	Static C_o	
	mm/inch											kg
UK205+H2305	**25**	52	23	17	**20**	35	8	38	3,9	13300	7457	0,25
UK205+HE2305	0,9843	2,0472	0,9055	0,6693	¾	1,378	0,315	1,496	0,154			
UK206+H2306	**30**	62	26	19	**25**	38	8	45	5,0	18525	10735	0,36
UK206+HS2306												
UK206+HE2306	1,1811	2,4409	1,0236	0,7480	1	1,496	0,315	1,772	0,197			
UK207+H2307	**35**	72	29	20	**30**	43	9	52	5,7	24415	14630	0,57
UK207+HS2307	1,3780	2,8346	1,1417	0,7874	11/8	1,693	0,354	2,047	0,224			
UK208+H2308	**40**	80	31	21	**35**	46	10	58	6,2	27645	16910	0,74
UK208+HE2308					1¼							
UK208+HS2308	1,5748	3,1496	1,2205	0,8268	13/8	1,811	0,394	2,283	0,244			
UK209+H2309	**45**	85	31	22	**40**	50	11	65	6,4	32395	20235	0,83
UK209+HA2309					17/16							
UK209+HE2309	1,7717	3,3465	1,2205	0,8661	1½	1,969	0,433	2,559	0,252			
UK209+HS2309					15/8							
UK210+H2310	**50**	90	32	24	**45**	55	12	70	6,5	33345	22135	0,97
UK210+HS2310					15/8							
UK210+HA2310	1,9685	3,5433	1,2598	0,9449	111/16	2,165	0,472	2,756	0,256			
UK210+HE2310					1¾							
UK211+H2311	**55**	100	35	25	**50**	59	12	75	7,0	41230	27930	1,26
UK211+HS2311					17/8							
UK211+HA2311	2,1654	3,9370	1,3780	0,9843	115/16	2,323	0,472	2,953	0,276			
UK211+HE2311					2							
UK212+H2312	**60**	110	38	27	**55**	62	13	80	7,6	49780	34390	1,59
UK212+HS2312	2,3622	4,3307	1,4961	1,0630	21/8	2,441	0,512	3,150	0,299			
UK213+H2313	**65**	120	40	28	**60**	65	14	85	8,5	54340	38095	1,76
UK213+HA2313					23/16							
UK213+HE2313	2,5591	4,7244	1,5748	1,1024	2¼	2,559	0,551	3,346	0,335			
UK213+HS2313					23/8							
UK215+H2315	**75**	130	44	30	**65**	73	15	98	9,2	64030	45885	2,32
UK215+HA2315					27/16							
UK215+HE2315	2,9528	5,1181	1,7323	1,1811	2½	2,874	0,591	3,858	0,362			
UK216+H2316	**80**	140	45	32	**70**	78	17	105	9,5	69065	50350	3,06
UK216+HA2316					211/16							
UK216+HE2316	3,1496	5,5118	1,7717	1,2598	2¾	3,071	0,669	4,134	0,374			
UK217+H2317	**85**	150	46	34	**75**	82	18	110	10,2	79800	58805	3,88
UK217+HA2317					215/16							
UK217+HE2317	3,3465	5,9055	1,8110	1,3386	3	3,228	0,709	4,331	0,402			
UK218+H2318	**90**	160	47	36	**80**	86	18	120	11,2	91295	67925	4,74
UK218+HA2318	3,5433	6,2992	1,8504	1,4173	33/16	3,386	0,709	4,724	0,441			


Available stainless steel AISI 440C

Inch dimension adapter sleeves HA; HE; HS

FISATECH

UKX - *Medium duty*

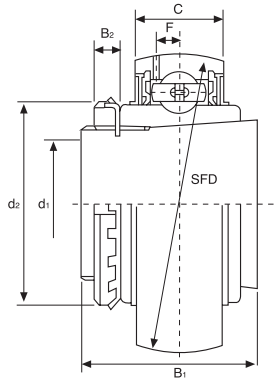

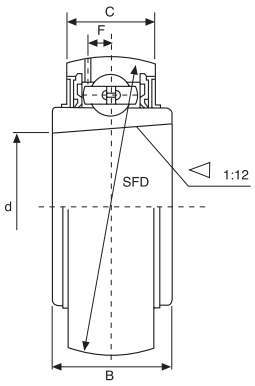




Type	Dimensions									Load ratings (N)		Weight
	d	D	B	C	d_1	B_1	B_2	d_2	F	Dynamic C	Static C_o	
	mm/inch											kg
UKX05+H2305	**25**	62	26	19	**20**	35	8	38	5	18525	10735	0,37
UKX05+HE2305	0,9845	2,4409	1,0236	0,7480	¾	1,378	0,315	1,496	0,197			
UKX06+H2306	**30**	72	29	20	**25**	38	8	45	5,7	24415	14630	0,59
UKX06+HS2306	1,1811	2,8346	1,1417	0,7874	7/8	1,496	0,315	1,771	0,244			
UKX06+HE2306					1							
UKX07+H2307	**35**	80	31	21	**30**	43	9	52	6,2	27645	18910	0,75
UKX07+HS2307	1,3780	3,1496	1,2205	0,8268	11/8	1,693	0,354	2,047	0,244			
UKX08+H2308	**40**	85	31	22	**35**	46	10	58	6,4	32395	20235	0,86
UKX08+HE2308	1,5748	3,3465	1,2205	0,8661	1¼	1,811	0,394	2,284	0,252			
UKX08+HS2308					13/8							
UKX09+H2309	**45**	90	32	24	**40**	50	11	65	6,5	33345	22135	0,96
UKX09+HA2309					17/16							
UKX09+HE2309	1,7717	3,5433	1,2598	0,9449	1½	1,969	0,433	2,559	0,256			
UKX09+HS2309					15/8							
UKX10+H2310	**50**	100	35	25	**45**	55	12	70	7,0	41230	27930	1,34
UKX10+HS2310					15/8							
UKX10+HA2310	1,9685	3,9370	1,3780	0,6843	111/16	2,165	0,472	2,756	0,726			
UKX10+HE2310					1¾							
UKX11+H2311	**55**	100	38	27	**50**	59	12	75	7,6	49780	34390	1,67
UKX11+HS2311					17/8							
UKX11+HA2311	2,1654	4,3307	1,496	1,0630	115/16	2,323	0,472	2,953	0,299			
UKX11+HE2311					2							
UKX12+H2312	**60**	120	40	28	**55**	62	13	80	8,5	54340	38095	1,84
UKX12+HS2312	2,3622	4,7244	1,5748	1,1024	21/8	2,441	0,512	3,150	0,335			
UKX13+H2313	**65**	125	40	29	**60**	65	14	85	8,9	59090	41895	2,15
UKX13+HA2313					23/16							
UKX13+HE2313	2,5591	4,9213	1,5748	1,1417	2¼	2,559	0,551	3,346	0,350			
UKX13+HS2313					23/8							
UKX15+H2315	**75**	140	45	32	**65**	73	15	98	9,5	69065	50350	3,05
UKX15+HA2315	2,9528	5,5118	1,7717	1,2598	27/16	2,874	0,591	3,858	0,374			
UKX15+HS2315					2½							
UKX16+H2316	**80**	150	46	34	**70**	78	17	105	10,2	79800	58805	3,95
UKX16+HA2316	3,1496	5,9055	1,811	1,3386	211/16	3,071	0,669	4,134	0,402			
UKX16+HS2316					2¾							
UKX17+H2317	**85**	160	47	36	**75**	82	18	110	11,2	91295	67925	4,83
UKX17+HA2317	3,3465	6,2992	1,8504	1,4173	215/16	3,228	0,709	4,331	0,441			
UKX17+HE2317					3							
UKX18+H2318	**90**	170	52	39	**80**	86	18	120	12,5	103550	77805	5,45
UKX18+HA2318	3,5433	6,6929	1,9685	1,5354	33/16	3,386	0,709	4,724	0,492			


Inch dimension adapter sleeves HA; HE; HS

FISATECH

UK3 - *Heavy duty*



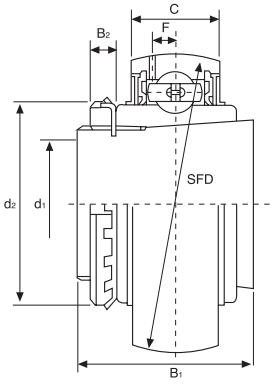

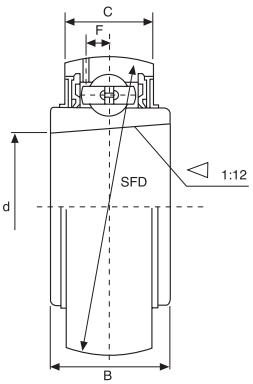


Type	Dimensions									Load ratings (N)		Weight
	d	D	B	C	d_1	B_1	B_2	d_2	F	Dynamic C	Static C_o	
	mm/inch											kg
UK305+H2305	25	62	26	20	**20**	35	8	38	5,0	20140	10355	0,48
UC305+HE2305	0,9843	2,4409	1,0236	0,7874	¾	1,378	0,315	1,496	0,197			
UK306+H2306	30	72	29	23	**25**	38	8	45	5,9	25365	14250	0,59
UK306+HS2306	1,1811	2,8346	1,1417	0,9055	7/8	1,496	0,315	1,772	0,232			
UK306+HE2306					1							
UK307+H2307	35	80	33	25	**30**	43	9	52	6,8	31730	18335	0,76
UK307+HS2307	1,3780	3,1496	1,2992	0,9843	11/8	1,693	0,354	2,047	0,268			
UK308+H2308	40	90	34	27	**35**	46	10	58	7,4	38665	22800	1,07
UK308+HE2308	1,5748	3,5433	1,3386	1,0630	1¼	1,811	0,394	2,283	0,291			
UK308+HS2308					13/8							
UK309+H2309	45	100	37	29	**40**	50	11	65	7,4	46455	28025	1,31
UK309+HA2309					17/16							
UK309+HE2309	1,7717	3,9370	1,4567	1,1417	1½	1,969	0,433	2,559	0,291			
UK309+HS2309					15/8							
UK310+H2310	50	110	41	32	**45**	55	12	70	8,1	58900	36385	1,70
UK310+HS2310					15/8							
UK310+HA2310	1,9685	4,3307	1,6142	1,2598	111/16	2,165	0,472	2,756	0,319			
UK310+HE2310					1¾							
UK311+H2311	55	120	44	34	**50**	59	12	75	8,5	68020	42750	2,06
UK311+HS2311					17/8							
UK311+HA2311	2,1654	4,7244	1,7323	1,3386	115/16	2,323	0,472	2,953	0,335			
UK311+HE2311					2							
UK312+H2312	60	130	47	36	**55**	62	13	80	9	77805	49590	2,58
UK312+HS2312	2,3622	5,1181	1,8504	1,4173	21/8	2,441	0,512	3,150	0,354			
UK313+H2313	65	140	49	39	**60**	65	14	85	10,1	88065	56905	3,07
UK313+HA2313					23/16							
UK313+HE2313	2,5591	5,5118	1,9291	1,5354	2¼	2,559	0,551	3,346	0,398			
UK313+HS2313					23/8							
UK315+H2315	75	160	55	43	**65**	73	15	98	11	107350	73340	4,82
UK315+HA2315	2,9528	6,2992	2,1654	1,6929	27/16	2,874	0,591	3,858	0,433			
UK315+HE2315					2½							
UK316+H2316	80	170	58	45	**70**	78	17	105	11,4	116850	82365	5,63
UK316+HA2316	3,1496	6,6929	2,2835	1,7717	211/16	3,071	0,669	4,134	0,449			
UK316+HE2316					2¾							
UK317+H2317	85	180	60	47	**75**	82	18	110	12,0	126350	91960	6,47
UK317+HA2317	3,3465	7,0866	2,3622	1,8504	215/16	3,228	0,709	4,331	0,472			
UK317+HE2317					3							
UK318+H2318	90	190	64	49	**80**	86	18	120	12,3	135850	101650	7,52
UK318+HA2318	3,5433	7,4803	2,5197	1,9291	33/16	3,386	0,709	4,724	0,484			

Inch dimension adapter sleeves HA; HE; HS

FISATECH

SER2 - *Standard duty*

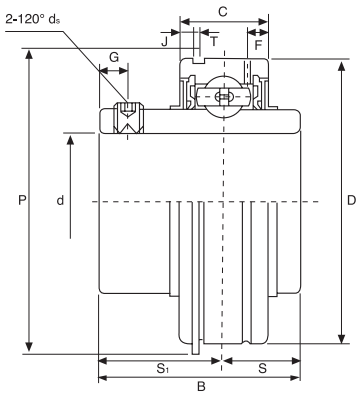



UNF suffix: inch sizes set screws


Type	Dimensions												Load ratings (N)		Weight
	d	D	B	C	S	S_1	T	F	J	P	G	d_s	Dynamic C	Static C_o	
	mm/inch														kg
SER204	**20**	47	31	15,9	10,3	20,7	1,12	3,8	2,46	52,7	4,8	M6x1	9880	6200	0,21
SER204-12	¾	1,8504	1,2205	0,6260	0,406	0,815	0,044	0,150	0,097	2,075	0,189	¼-28UNF			
SER205	**25**	52	34,9	19	13,1	21,8	1,12	5,2	2,46	57,9	5	M6x1			
SER205-13	13/16														
SER205-14	7/8	2,0472	1,3740	0,7480	0,516	0,858	0,044	0,205	0,097	2,280	0,197	¼-28UNF	10780	6980	0,27
SER205-15	15/16														
SER205-16	1														
SER206	**30**	62	38,1	22,2	15,9	22,2	1,7	5,6	3,28	67,7	5	M6x1			
SER206-17	11/16														
SER206-18	11/8	2,4409	1,5000	0,8740	0,626	0,874	0,067	0,220	0,129	2,665	0,197	¼-28UNF	14970	10040	0,39
SER206-19	13/16														
SER206-20	1¼														
SER207	**35**	72	42,9	23,8	17,5	25,4	1,7	5,6	3,28	78,6	6,7	M8x1			
SER207-20	1¼														
SER207-21	15/16	2,8346	1,6890	0,9370	0,689	1,000	0,067	0,220	0,129	3,094	0,264	5/16-24UNF	19750	13670	0,63
SER207-22	13/8														
SER207-23	17/16														
SER208	**40**	80	49,2	27,8	19	30,2	1,7	6,4	3,28	86,6	8	M8x1			
SER208-24	1½	3,1496	1,9370	1,0945	0,748	1,189	0,067	0,252	0,129	3,409	0,315	5/16-24UNF	22710	14940	0,81
SER208-25	19/16														
SER209	**45**	85	49,2	27,8	19	30,2	1,7	6,4	3,28	91,6	8	M8x1			
SER209-26	15/8														
SER209-27	111/16	3,3465	1,9370	1,0945	0,748	1,189	0,067	0,252	0,129	3,606	0,315	5/16-24UNF	24360	17710	0,90
SER209-28	1¾														
SER210	**50**	90	51,6	28,6	19	32,6	2,46	7,5	3,28	96,5	10	M10x1			
SER210-29	113/16														
SER210-30	17/8	3,5433	2,0315	1,1260	0,748	1,283	0,097	0,295	0,129	3,799	0,394	3/8-24UNF	26980	19840	0,98
SER210-31	115/16														
SER210-32	2														
SER211	**55**	100	55,6	30,2	22,2	33,4	2,46	7,5	3,28	106,5	10	M10x1			
SER211-32	2														
SER211-33	21/16	3,9370	2,1890	1,1890	0,874	1,315	0,097	0,295	0,129	4,193	0,394	3/8-24UNF	33370	25110	1,40
SER211-34	21/8														
SER211-35	23/16														
SER212	**60**	110	65,1	31,8	25,4	39,7	2,46	7,5	3,28	116,6	10	M10x1			
SER212-36	2¼														
SER212-37	25/16	4,3307	2,5630	1,2520	1,000	1,563	0,097	0,295	0,129	4,591	0,394	3/8-24UNF	36740	27970	1,89
SER212-38	23/8														
SER212-39	27/16														

FISATECH

SA2 - *Light duty*




UNF suffix: inch sizes set screws

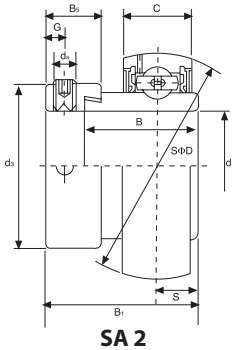


SA 2

outer spherical ring




SA 2S

outer spherical ring, with relubrication groove

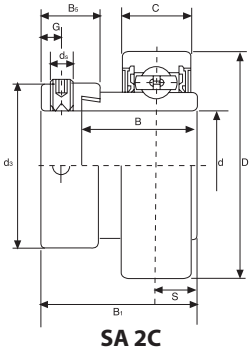

SA 2C

outer cylindrical ring



SA 2CS


outer cylindrical ring, with groove for snap ring

Type	Dimensions											Load ratings (N)		Weight
	d	D	B_1	B	C	S	d_5	G	B_5	d_3	F	Dynamic C	Static C_o	
	mm/inch													kg
SA201	**12**	40	28,6	19,1	12	6,5	M6x1	4,8	13,5	28,6	3,7	9200	4480	0,12
SA201-8	¾	1,5748	1,126	0,7520	0,4724	0,256	¼-28UNF	0,189	0,531	1,126	0,146			0,12
SA202	**15**	40	28,6	19,1	12	6,5	M6x1	4,8	13,5	28,6	3,7			0,10
SA202-9	9/16											9200	4480	0,10
SA202-10	5/8	1,5748	1,126	0,7520	0,4724	0,256	¼-28UNF	0,189	0,531	1,126	0,146			0,10
SA203	**17**	40	28,6	19,1	12	6,5	M6x1	4,8	13,5	28,6	3,7	9200	4480	0,09
SA203-11	11/16	1,5748	1,126	0,7520	0,4724	0,256	¼-28UNF	0,189	0,531	1,126	0,146			0,09
SA204	**20**	47	31	21,5	14	7,5	M6x1	4,8	13,5	33,3	3,7	12200	6300	0,16
SA204-12	¾	1,8504	1,220	0,8465	0,5512	0,295	¼-28UNF	0,189	0,531	1,311	0,146			0,16
SA205	**25**	52	31	21,5	15	7,5	M6x1	4,8	13,5	38,1	3,9			0,20
SA205-13	13/16													0,22
SA205-14	7/8											13300	7460	0,21
SA205-15	15/16	2,0472	1,220	0,8465	0,5906	0,295	¼-28UNF	0,189	0,531	1,500	0,154			0,21
SA205-16	1													0,20
SA206	**30**	62	35,7	23,8	16	9	M8x1	6	15,9	44,5	5,0			0,30
SA206-17	11/16													0,32
SA206-18	11/8											18500	10800	0,31
SA206-19	13/16	2,4409	1,406	0,9370	0,6299	0,354	5/16-28UNF	0,236	0,626	1,752	0,197			0,30
SA206-20	1¼													0,29
SA207	**35**	72	38,9	25,4	17	9,5	M8x1	6,8	17,5	55,6	5,7			0,42
SA207-20	1¼													0,46
SA207-21	15/16											24500	14600	0,43
SA207-22	13/8	2,8346	1,531	1,000	0,6693	0,374	5/16-24UNF	0,268	0,689	2,189	0,224			0,42
SA207-23	17/16													0,41
SA208	**40**	80	43,7	30,2	18	11	M8x1	6,8	18,3	60,3	6,2			0,60
SA208-24	1½											27700	17000	0,58
SA208-25	19/16	3,1496	1,721	1,1890	0,7087	0,433	5/16-24UNF	0,268	0,720	2,374	0,244			0,60
SA209	**45**	85	43,7	30,2	19	11	M8x1	6,8	18,3	63,5	6,4			
SA209-26	15/8													
SA209-27	111/16	3,3465	1,721	1,1890	0,7480	0,433	5/16-24UNF	0,268	0,720	2,500	0,252	31100	24450	0,76
SA209-28	1¾													
SA210	**50**	50	43,7	30,2	20	11	M8x1	6,8	18,3	69,9	6,5			
SA210-29	113/16													
SA210-30	17/8											35300	28160	0,91
SA210-31	115/16	3,5433	1,721	1,1890	0,7874	0,433	5/16-24UNF	0,268	0,720	2,752	0,256			
SA210-32	2													
SA211	**55**	100	48,4	32,5	21	12	M8x1	8	20,7	76,2	7,0			
SA211-32	2													
SA211-33	21/16											38100	30000	1,26
SA211-34	21/8	3,9370	1,906	1,2795	0,8268	0,472	5/16-24UNF	0,315	0,815	3,000	0,276			
SA211-35	23/16													
SA212	**60**	110	53,1	37,2	22	13,5	M10x1	8	22,3	84,2	7,6			
SA212-36	2¼													
SA212-37	25/16											41500	32730	1,70
SA212-38	23/8	4,3307	2,091	1,4646	0,8661	0,532	3/8-24UNF	0,315	0,878	3,315	0,299			
SA212-39	27/16													

Available stainless steel AISI 440C


FISATECH

SB-RB2 - *Light duty*




SB 2

outer spherical ring




SB 2S

outer spherical ring, with groove for snap ring



RB 2C

outer cylindrical ring



RB 2CS

outer cylindrical ring, with groove for snap ring



UNF suffix: inch sizes set screws


Type	*Dimensions*									*Load ratings (N)*		*Weight*
	d	**D**	**B**	**C**	**S**	**S_1**	**d_s**	**G**	**F**	*Dynamic C*	*Static C_o*	
	mm/inch											**kg**
SB-RB201	**12**	40	22	12	6	16	M5x0,8	4,5	3,7	9200	4480	0,10
SB-RB201-8	¾	1,5748	0,8661	0,4724	0,236	0,630	10-32UNF	0,177	0,146			0,10
SB-RB202	**15**	40	22	12	6	16	M5x0,8	4,5	3,7			0,10
SB-RB202-9	9/16									9200	4480	0,10
SB-RB202-10	5/8	1,5748	0,8661	0,4724	0,236	0,630	10-32UNF	0,177	0,146			0,10
SB-RB203	**17**	40	22	12	6	16	M5x0,8	4,5	3,7	9200	4480	0,09
SB-RB203-11	11/16	1,5748	0,7520	0,4724	0,256	1/4-28UNF	0,189	0,531	0,146			0,09
SB-RB204	**20**	47	25	14	7	18	M6x1	4,5	3,7	12200	6300	0,13
SB-RB204-12	¾	1,8504	0,9843	0,5512	0,276	0,709	¼-28UNF	0,177	0,146			0,14
SB-RB205	**25**	52	27	15	7,5	19,5	M6x1	5,5	3,9			0,16
SB-RB205-13	13/16											0,19
SB-RB205-14	7/8									13300	7460	0,18
SB-RB205-15	15/16	2,0472	1,0630	0,5906	0,295	0,768	¼-28UNF	0,217	0,154			0,17
SB-RB205-16	1											0,16
SB-RB206	**30**	62	30	16	8	22	M6x1	6	5,0			0,25
SB-RB206-17	11/16											0,28
SB-RB206-18	11/8									18500	10800	0,26
SB-RB206-19	13/16	2,4409	1,1811	0,6299	0,315	0,866	¼-28UNF	0,236	0,197			0,25
SB-RB206-20	1¼											0,24
SB-RB207	**35**	72	32	17	8,5	23,5	M8x1	6,5	5,7			0,38
SB-RB207-20	1¼											0,43
SB-RB207-21	15/16									24500	14600	0,41
SB-RB207-22	13/8	2,8346	1,2598	0,6693	0,335	0,925	5/16-24UNF	0,256	0,224			0,38
SB-RB207-23	17/16											0,37
SB-RB208	**40**	80	34	18	9	25	M8x1	7	6,2			0,60
SB-RB208-24	1½									27700	17000	0,58
SB-RB208-25	19/16	3,1496	1,3386	0,7087	0,354	0,984	5/16-24UNF	0,276	0,244			0,60
SB-RB209	**45**	85	41,2	19	10,2	31	M8x1	8,2	6,4			
SB-RB209-26	15/8											
SB-RB209-27	111/16	3,3465	1,6220	0,7480	0,402	1,220	5/16-24UNF	0,323	0,252	31100	24450	0,8
SB-RB209-28	1¾											
SB-RB210	**50**	90	43,5	20	10,9	32,6	M10x1	9,2	6,5			
SB-RB210-29	113/16											
SB-RB210-30	17/8									35300	28160	0,8
SB-RB210-31	115/16	3,5433	1,7126	0,7874	0,429	1,283	3/8-24UNF	0,362	0,256			
SB-RB210-32	2											
SB-RB211	**55**	100	45,3	21	11,8	33,5	M10x1	9,8	7,0			
SB-RB211-32	2											
SB-RB211-33	21/16									38100	30000	1,1
SB-RB211-34	21/8	3,9370	1,7835	0,8268	0,465	1,319	3/8-24UNF	0,386	0,276			
SB-RB211-35	23/16											
SB-RB212	**60**	110	53,7	22	14,9	38,8	M10x1	9,8	7,6			
SB-RB212-36	2¼											
SB-RB212-37	25/16									41500	32730	1,3
SB-RB212-38	23/8	4,3307	2,1142	0,8661	0,587	1,528	3/8-24UNF	0,386	0,299			
SB-RB212-39	27/16											

Available stainless steel AISI 440C

FISATECH

CB2 - *Light duty*



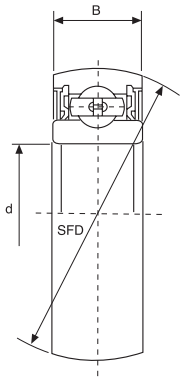


Type	Dimensions			Load ratings (N)		Weight
	d	D	B	Dynamic C	Static C_o	
	mm/inch					kg
CB200 CB200	**10** 0,3937	30 1,1811	9 0,3543	3750	2150	0,030
CB201 CB201	**12** 0,4724	32 1,2598	10 0,3937	4500	2500	0,035
CB202 CB202	**15** 0,5906	35 1,3780	11 0,4331	5650	3300	0,040
CB203 CB203	**17** 0,6693	40 1,5748	12 0,4724	7000	4480	0,06
CB204 CB204	**20** 0,7874	47 1,8504	14 0,5512	9880	6200	0,10
CB205 CB205	**25** 0,9843	52 2,0472	15 0,5906	10780	6980	0,13
CB206 CB206	**30** 1,1811	62 2,4409	16 0,6299	14970	10040	0,20
CB207 CB207	**35** 1,3780	72 2,8346	17 0,6693	19750	13670	0,29
CB208 CB208	**40** 1,5748	80 3,1496	18 0,7087	22710	15940	0,37
CB209 CB209	**45** 1,7717	85 3,3465	19 0,7480	24360	17710	0,46
CB210 CB210	**50** 1,9685	90 3,5433	20 0,7874	26980	19840	0,57
CB211 CB211	**55** 2,1654	100 3,9370	21 0,8268	28500	21850	0,62
CB212 CB212	**60** 2,3622	110 4,3307	22 0,8661	31700	24500	0,80

Equivalent 62.. spherical ISB ®

BEARINGS WITH SET SCREWS



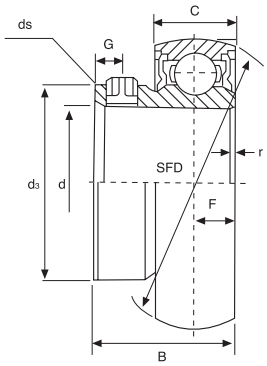



Type	Dimensions									Load ratings (N)		Weight
	d	D	B	C	d_3	F	G	r	d_s	Dynamic C	Static C_o	
	mm/inch											kg
U0000 U0000	**10** 0,3937	26 1,024	14 0,5512	8 0,3150	14,75 0,5807	4 1,1575	3 0,1181	0,5 0,0197	M3	470	200	0,023
U0001 U0001	**12** 0,4724	28 1,1024	14,5 0,5709	8 0,3150	17,35 0,6831	4 1,1575	3 0,1181	0,5 0,0197	M3	520	245	0,027
U0002 U0002	**15** 0,5906	32 1,2598	16,5 0,6496	9 0,3543	20,02 0,7882	4,5 0,1772	3,5 0,1378	0,5 0,0197	M4	570	290	0,045
U0003 U0003	**17** 0,6693	35 1,3780	17,5 0,6890	10 0,3937	23,10 0,9094	5 0,1969	3,5 0,1378	0,5 0,0197	M4	610	335	0,050
U0004 U0004	**20** 0,7874	42 1,6535	21 0,8268	12 0,4724	27,00 1,0630	6 0,2362	4 1,1575	1 0,0394	M5	955	515	0,086
U0005 U0005	**25** 0,9843	47 1,8504	22,5 0,8858	12 0,4724	31,70 1,2480	6 0,2362	4,5 0,1772	1 0,0394	M5	1030	595	0,100
U0006 U0006	**30** 1,1811	55 2,1654	24,5 0,9646	13 0,5118	38,00 1,4961	6,5 0,2559	5 0,1969	1,5 0,0591	M5	1350	845	0,145


Available under request stainless steel: AISI 440C

Fisatech s.r.o., Hlavná 361/53, 076 64 Z. Teplica, tel.: 0908 135 761, e-mail: info@fisatech.sk www.fisatech.sk

Serie H 23 - *Type H23*









Type	Dimensions				Sleeve	Look nut	Washer	Bearing			Weight
	d_1	B_1	B_2	d_3	A...	KM	MB	Normal duty	Medium duty	Heavy duty	kg
	mm/inch										
H 2305	**20**	35	8	38	**A 2305X**	KM 05	MB 05	UK 205	UK X05	UK 305	0,087
HE 2305	¾	1,3780	0,3150	1,4961	AE 2305X						
H 2306	**25**	38	8	45	**A 2306X**	KM 06	MB 06	UK 206	UK X06	UK 306	0,126
HS 2306	7/8				AS 2306X						
HA 2306	15/16	1,4961	0,3150	1,7717	AA 2306X						
HE 2306	1				AE 2306X						
H 2307	**30**	43	9	52	**A 2307X**	KM 07	MB 07	UK 207	UK X07	UK 307	0,165
HS 2307	11/8	1,6929	0,3543	2,0472	AS 2307X						
HA 2307	13/16				AA 2307X						
H 2308	**35**	46	10	58	**A 2308X**	KM 08	MB 08	UK 208	UK X08	UK 308	0,224
HE 2308	1¼	1,8110	0,3937	2,2835	AE 2308X						
HS 2308	13/8				AS 2308X						
H 2309	**40**	50	11	65	**A 2309X**	KM 09	MB 09	UK 209	UK X09	UK 309	0,280
HA 2309	17/16				AA 2309X						
HE 2309	1½	1,9685	0,4331	2,5591	AE 2309X						
HS 2309	15/8				AS 2309X						
H 2310	**45**	55	12	70	**A 2310X**	KM 10	MB 10	UK 210	UK X10	UK 310	0,362
HA 2310	111/16	2,1654	0,4724	2,7559	AA 2310X						
HE 2310	1¾				AE 2310X						
H 2311	**50**	59	12	75	**A 2311X**	KM 11	MB 11	UK 211	UK X11	UK 311	0,420
HS 2311	17/8				AS 2311X						
HA 2311	115/16	2,3228	0,4724	2,9528	AA 2311X						
HE 2311	2				AE 2311X						
H 2312	**55**	62	13	80	**A 2312X**	KM 12	MB 12	UK 212	UK X12	UK 312	0,480
HS 2312	21/8	2,4409	0,5118	3,1496	AS 2312X						
H 2313	**60**	65	14	85	**A 2313X**	KM 13	MB 13	UK 213	UK X13	UK 313	0,556
HA 2313	23/16				AA 2313X						
HE 2313	2¼	2,5591	0,5512	3,3465	AE 2313X						
HS 2313	23/8				AS 2313X						
H 2315	**65**	73	15	98	**A 2315X**	KM 15	MB 15	UK 215	UK X15	UK 315	1,05
HE 2315	2½	2,8740	0,5906	3,8583	AE 2315X						
HS 2315	25/8				AS 2315X						
H 2316	**70**	78	17	105	**A 2316X**	KM 16	MB 16	UK 216	UK X16	UK 316	1,28
HE 2316	2¾	3,0709	0,6693	4,1339	AE 2316X						
H 2317	**75**	82	18	110	**A 2317X**	KM 17	MB 17	UK 217	UK X17	UK 317	1,45
HS 2317	27/8				AS 2317X						
HA 2317	215/16	3,2283	0,7087	4,3307	AA 2317X						
HE 2317	3				AE 2317X						
H 2318	**80**	86	18	120	**A 2318X**	KM 18	MB 18	UK 218	UK X18	UK 318	1,70
HA 2318	33/16	3,3858	0,7087	4,7244	AA 2318X						
H 2319	**85**	90	19	125	**A 2319X**	KM 19	MB 19	-	-	UK 319	1,94
HE 2319	3¼	3,5433	0,7480	4,9213	AE 2319X						
H 2320	**90**	97	20	130	**A 2320X**	KM 20	MB 20	-	UK X20	UK 320	2,15
HE 2320	3½	3,8189	0,7874	5,1181	AE 2320X						
H 2322	**100**	105	21	145	**A 2322X**	KM 22	MB 22	-	-	UK 322	2,74
HE 2322	4	4,1339	0,8268	5,7087	AE 2322X						
H 2324	**110**	112	22	155	**A 2324X**	KM 24	MB 24	-	-	UK 324	3,20
HA 2324	47/16	4,4094	0,8661	6,1024	AA 2324X						
H 2326	**115**	121	23	165	**A 2326X**	KM 26	MB 26	-	-	UK 326	4,60
HE 2326	4½	4,7638	0,9055	6,4961	AE 2326X						
H 2328	**125**	131	24	180	**A 2328X**	KM 28	MB 28	-	-	UK 328	5,52
HA 2328	415/16	5,1575	0,9449	7,0866	AA 2328X						
HE 2328	51/8				AE 2328X						

FISATECH