
## art.BD LVZ... MOBILE SUPPORTS BASES "BD LVZ" mod.10/60 for Compact steel and Bidirectional supports.


The **BD LVZ FFP** "Standard" base, also made from drawn iron (Fe) plate and nitrided, normally used for the fitting of mobile Supports **LVZ** and **LVW**, has all the holes threaded with the exception of four countersunk holes used for axial play adjustment. This version facilitates the assembly/dismantling of the Group together with allowing axial play adjustment of the nut from above the machine's "mobile carriage".

Supports Base **art.BD LVZ...FFP STANDARD** series.

**CHARACTERISTICS:**
**Fitting and axial play adjustment from above the carriage.**

**Mod. FFP**

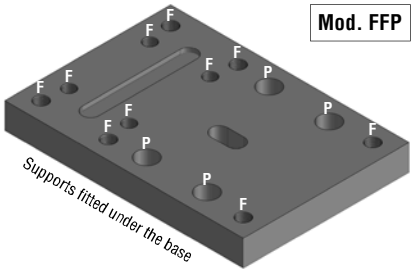

**Base BD LVZ...FFP**
Used on Compact Groups with exception of Compact light (see pages 81-82).

**Threaded holes "F" (shown as "FF" in the chart)**
10 threaded holes for fitting the support and of the Base to the machine.

**Countersunk through holes "P" (shown as "FPL" in the chart)**
4 countersunk through holes for adjusting axial play.


---

For special applications where different fitting is required we can, on request, supply versions with different hole configurations to the "Standard" whilst always produced from drawn iron (Fe) plate and nitrided, as illustrated below.

Supports Base **art.BD LVZ...FF** series with all holes threaded.

**CHARACTERISTICS:**
**Fitting above the carriage with axial play adjustment from below.**

**Mod. FF**

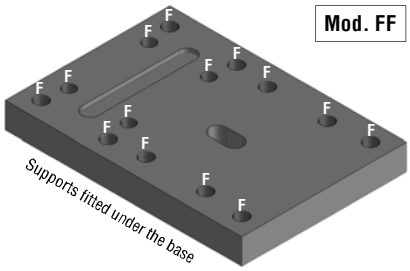



**Threaded holes "F" (shown as "FF" in the chart)**
14 threaded holes for fitting the supports, of the Base to the machinery and axial play adjustment..

Supports Base **art.BD LVZ...FF/8** with 8 threaded holes.

**CHARACTERISTICS:**
**Fitting and axial play adjustment from below the carriage.**

**Mod. FF/8**

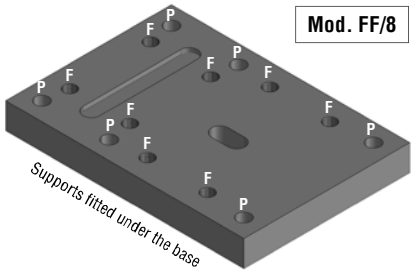



**Threaded holes "F" (shown as "FF" in the chart)**
8 threaded holes for fitting the support and axial play adjustment.

**Countersunk through holes "P" (shown as "FPL" in the chart)**
6 holes for fitting to the Base to the machinery.

Supports Base **art.BD LVZ...FPL** series with 10 countersunk through holes.

**CHARACTERISTICS:**
**Fitting below the carriage with axial play adjustment from above.**

**Mod. FPL**

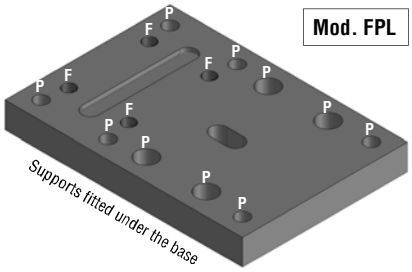



**Threaded holes "F" (shown as "FF" in the chart)**
4 threaded holes for fitting the support to the Base.

**Countersunk through holes "P" (shown as "FPL" in the chart)**
10 for fitting and axial play adjustment.

To order, as well as adding the symbol of the holes required to the end of the **ARTICLE**, add to the **CODE** the number missing in reference to the holes.
**EXAMPLE: holes mod. "FFP" = n. "0" - mod. "FF" = n. "1" - mod. "FF/8" = n. "2" - mod. "FPL" = n. "3" (art. BD LVZ 40 FPL = Cod. 300SAB1340).**

| MODELS | CODE | ARTICLE | A | B | S | F1 | F2 | F5 | FF | FPL Screw seat | WEIGHT Kg |
|---|---|---|---|---|---|---|---|---|---|---|---|
| mod. 10 | 300SAB1..10 | BD LVZ 10 ... | 100 | 75 | 12 | 59 | 34 | 50 | M6 | M6x16 | 0,640 |
| mod. 12 14 | 300SAB1..1214 | BD LVZ 1214 ... | 110 | 80 | 12 | 64 | 34 | 60 | M6 | M6x16 | 0,760 |
| mod. 16 | 300SAB1..16 | BD LVZ 16 ... | 130 | 90 | 15 | 70 | 40 | 70 | M8 | M8x25 | 1,250 |
| mod. 18 | 300SAB1..18 | BD LVZ 18 ... | 140 | 100 | 15 | 80 | 45 | 75 | M8 | M8x25 | 1,510 |
| mod. 20 22 | 300SAB1..2022 | BD LVZ 2022 ... | 155 | 100 | 15 | 80 | 50 | 85 | M8 | M8x25 | 1,680 |
| mod. 24 25 26 | 300SAB1..242526 | BD LVZ 242526 ... | 180 | 130 | 20 | 95 | 50 | 100 | M10 | M10x30 | 3,400 |
| mod. 28 30 32 | 300SAB1..283032 | BD LVZ 283032 ... | 185 | 130 | 20 | 100 | 50 | 105 | M10 | M10x30 | 3,520 |
| mod. 35 36 | 300SAB1..3536 | BD LVZ 3536 ... | 210 | 140 | 20 | 110 | 70 | 110 | M10 | M10x30 | 4,340 |
| mod. 40 | 300SAB1..40 | BD LVZ 40 ... | 230 | 160 | 25 | 125 | 65 | 130 | M12 | M12x35 | 6,770 |
| mod. 45 46 | 300SAB1..4546 | BD LVZ 4546 ... | 250 | 160 | 25 | 130 | 85 | 130 | M12 | M12x35 | 7,430 |
| mod. 50 | 300SAB1..50 | BD LVZ 50 ... | 260 | 180 | 25 | 135 | 85 | 140 | M12 | M12x35 | 8,700 |
| mod. 55 60 | 300SAB1..5560 | BD LVZ 5560 ... | 290 | 200 | 30 | 160 | 100 | 150 | M14 | M14x45 | 13,000 |

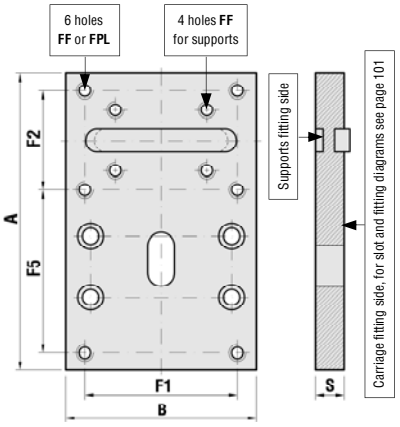


Photos, diagrams and technical data are the exclusive property of Bimeccanica srl. All rights reserved.